




TECHNICAL DATA SHEET

AQUA MASKING TAPE

Gerko aqua masking tape is a high quality waterproof masking tape for the professional user with high temperature resistance to minimize the chance of residue. Saturated crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive.

APPLICATION CONDITIONS

Gerko aqua masking tape is recommended for waterbased paint systems. Guaranteed spray painting oven use in 120°C for 30 minutes.

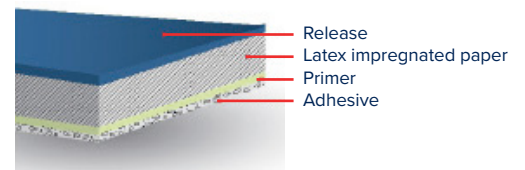

PROPERTIES

- Suitable for water based paints
- Excellent adhesion to rubber and metal
- Easily removable and leaves no adhesive residue
- Paper: impregnated green crepe paper
- Thickness: 135: microns
- Temperature resistance: 30 minutes at 120°C
- Adhesion to steel: 5 N/25 mm
- Excellent tape on tape adhesion
- Sharp and clean edge for precise sticking and easy application
- Solvent and water resistant
- Suited for IR and UV drying

PHYSICAL PROPERTIES

CODE	DESCRIPTION	COLOR	PIECES PER BOX	BOXES PER PALLET
AMT19	Aqua Masking Tape 19 mm x 50 m	Green	48	96
AMT24	Aqua Masking Tape 24 mm x 50 m	Green	36	96
AMT30	Aqua Masking Tape 30 mm x 50 m	Green	32	96
AMT38	Aqua Masking Tape 38 mm x 50 m	Green	24	96
AMT50	Aqua Masking Tape 50 mm x 50 m	Green	24	72



TECHNICAL DATA SHEET

AQUA MASKING TAPE

NOMINAL VALUES

	VALUE
Backing	Impregnated crepe paper
Adhesive	Solvent-based, natural rubber
Tensile Strength MD	110 ± 30 (N/25 mm) TM 5004 by Afera
Elongation at Break MD	10 ± 3 (%) TM 5004 by Afera
Peel Adhesion on Stainless Steel Paper thickness	5 ± 1 (N/25 mm) TM 5001 by Afera
Paper thickness	110 ± 15 (µm)
Total thickness	135 ± 25 (µm)
Temperature resistance	120°C (min)